



**neo**  
Created by OYAIDE Elec.



# PRODUCT CATALOG

## Cables & Accessories

DJ GEAR / INSTRUMENTS  
MICROPHONES / STUDIO GEAR  
AMPLIFIERS / EFFECT PEDALS  
for **and all sound  
professionals**



# 102 SSC

JAPAN MADE

The superior quality of Oyaide is recognized by more than 50 countries worldwide. It's a sign of our quality.

NEO is Oyaide's brand for professionals and creators of all types.


The concept is simple.

NEO aims to develop and offer new, exciting and high-quality products, combining tradition and innovation at a high level.

Pure passion and an uncompromising spirit of craftsmanship are in the spirit of NEO.

With outstanding performance and a high degree of versatility for heavy duty use, professionals immediately find the difference in quality.

NEO is the ultimate brand for established reliability and satisfaction, creating the best exciting and emotional sound professionals love to hear.

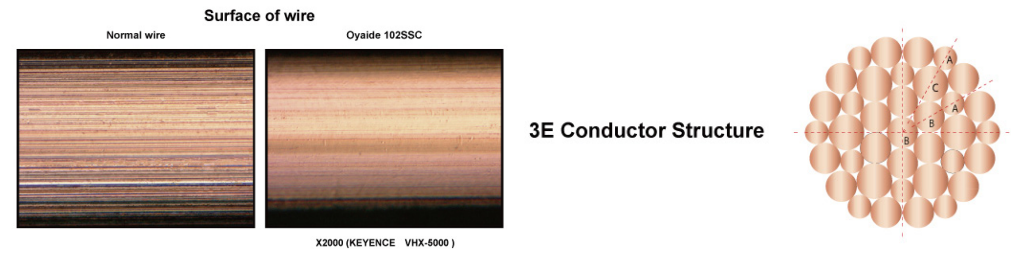

The copper called "102 SSC" is a conductor produced by Oyaide Elec. It shows an incredible conductivity level of 102.3% IACS (after annealing process).

The copper base material for the 102 SSC is refined in Japan and conforms to the elite Japanese JIS C1011 industrial standard.

Only pure virgin copper base is used. It does not contain any recycled material. Also, we have employed mechanical peeling – a very precisely controlled process that removes 100% of impurities. We also choose to use natural diamond dies over synthetic diamond dies which yield more uniform volume reduction with reduced stress and improved lubricity.

The 102 SSC wire's surface structure is far superior to all others. It has an outer diameter accuracy of  $\pm 1\mu\text{m}$ , far exceeding the  $\pm 0.8\mu\text{m}$  in Japanese standards for conventional copper wires.

The conductor structure of PA-02 V2 is created by a process called three element stranding. 3E stranding combines strands of three different diameters to increase the density of the wire by decreasing the spaces between strands. This results in a smaller outer diameter than the same gauge wire made with identical individual strands, plus a more accurate, stable, and perfectly circular cross section.



**Most Definitely**

Hi-speed transmit ability, Long-term durability, Higher data reliability

**cables for DJ GEAR**

# d+ USB series

USB 2.0 (HI-SPEED)  
480Mbps

Hi-Quality USB cable series for DAW / Digital DJs / PC Audio

# d+ RCA series

Hi-Quality RCA analog line cable series for DJs / Studios



**d+ USB class S (rev.2)**

Type : USB (A) - USB (B)  
Length : 1.0m / 2.0m / 3.0m



**d+ USB class A (rev.2)**

Type : USB (A) - USB (B)  
Length : 1.0m / 2.0m / 3.0m



**d+ USB class B**

Type : USB (A) - USB (B)  
Length : 0.7m / 1.0m / 2.0m / 3.0m / 5.0m



**d+ USB Type-C class B**

Type : USB (C) - USB (B)  
Length : 0.7m / 1.0m / 2.0m



**d+ USB Type-C to C class B**

Type : USB (C) - USB (C)  
Length : 1.0m / 2.0m



**d+ USB Type-A to C class B**

Type : USB (A) - USB (C)  
Length : 1.0m / 2.0m



**d+ RCA class S (rev.2)**

Type : RCA - RCA w/Cable bag  
Length : 1.0m / 2.0m



**d+ RCA class A (rev.2)**

Type : RCA - RCA  
Length : 1.0m / 2.0m



**d+ RCA class B**

Type : RCA - RCA  
Length : 1.0m / 2.0m / 3.0m



**d+ RCA for TurnTable class B**

Type : RCA - RCA w/ground wire  
Length : 1.0m / 2.0m



**d+ RCA for TurnTable class B DUO**

Type : RCA - RCA w/ground wire  
Length : 1.0m

	class S	class A	class B / Type-C class B
Conductor	"102SSC"	"102SSC"	OFC
	Power 18AWG Signal 22AWG	Power 21AWG Signal 25AWG	Power 21/23AWG Signal 25/30AWG
Insulation	PO	PO	PO
Jacket	TPE (Flat Shape) (Purple)	TPE (Flat Shape) (Orange)	Flex PVC (Flat Shape) (Green)
Connector	Platinum + Rhodium Plating Contacts	Gold Plating Contacts	Gold Plating Contacts



**d+ RCA class S DUO (rev.2)**

Type : RCA - RCA w/Cable bag  
Length : 1.0m



**d+ RCA class A DUO (rev.2)**

Type : RCA - RCA  
Length : 1.0m



**d+ RCA class B DUO**

Type : RCA - RCA  
Length : 1.0m

# d+ Power Cable

for sound & visual

Conductor	OFC
	16AWG #2conductor
Insulation	PVC
Jacket	Flex PVC (White)
Connector	24K Gold Plating Contacts



**d+ Power Cable C7**

Type : A-type Plug - IEC320 C7  
Length : 1.2m / 1.8m / 2.5m

	class S	class A	class B
Conductor	"102SSC" Inverted concentric Stranding	"102SSC" Inverted concentric Stranding	OFC Inverted concentric Stranding
	16AWG #3conductor	18AWG #3conductor	18AWG #3conductor
Insulation	PO	PO	PO
Jacket	TPE (Flat Shape) (Purple)	TPE (Flat Shape) (Orange)	Flex PVC (Flat Shape) (Green and White)
Connector	Platinum + Rhodium Plating Contacts	Gold Plating Contacts	Gold Plating Contacts



# d+ class B series

Analog connection cable series for DJs / Producers / Engineers



## class B

Conductor	OFC Inverted concentric Stranding
	18AWG #3conductor
Insulation	PO
Jacket	Flex PVC (Flat Shape) (Green and White)
Connector	Gold Plating Contacts



### d+ XLR class B

Type : XLR (F) - XLR (M)  
Length : 1.0m / 2.0m / 3.0m / 5.0m



### d+ TXM class B

Type : 1/4\"/>



### d+ XFT class B

Type : XLR (F) - 1/4\"/>



### d+ RCA class B

Type : RCA - RCA  
Length : 1.0m / 2.0m / 3.0m



### d+ RXM class B

Type : RCA - XLR (M)  
Length : 1.0m / 2.0m / 3.0m



### d+ XFR class B

Type : XLR (F) - RCA  
Length : 1.0m / 2.0m / 3.0m



### d+ TRS class B

Type : 1/4\"/>



### d+ TS class B

Type : 1/4\"/>



### d+ RTS class B

Type : 1/4\"/>



### d+ MYR class B

Type : 3.5mm TRS - RCA (pair)  
Length : 1.5m / 2.5m



### d+ MYTS class B

Type : 3.5mm TRS - 1/4\"/>



### d+ RCA for TurnTable class B

Type : RCA - RCA w/ground wire  
Length : 1.0m / 2.0m



### d+ CB-A (cable bag)

### d+ class B DJ set

Contents :  
d+ RCA class B 1.0m x 2set  
d+ USB class B 1.0m x 1pc  
d+ CB-A x 1pc





cables for

**INSTRUMENTS**  
**MICROPHONES**  
**STUDIO GEAR**

Power Cable

**BLACK MAMBA V2**  
series

The new standard with a versatile usability

Lineup

**BLACK MAMBA - α**

Type : Typ B Plug (NEMA5-15)  
- IEC320 C15

Length : 1.8m



**BLACK MAMBA - αe**

Type : Schuko Plug (CEE 7/4) (Typ F)  
- IEC320 C15

Length : 1.8m



102 SSC  
JAPAN MADE

- Conductor "102 SSC" 3.5sq (12AWG) #2conductor / OFC 3.5sq (12AWG) #1conductor
- Insulation Macro-molecular PO
- Shield Copper Foil Tape
- Jacket Halogen-free (Black)
- Connector Unplated Pure Brass Contacts Plugs (Dedicated BLACK MAMBA-Alpha)

Power Cable

**AXIS-303GX**


A high performance

Lineup

**AXIS-303 GX**

Type : Typ B Plug (NEMA5-15)  
- IEC320 C15

Length : 1.2 / 1.8m / 2.8m

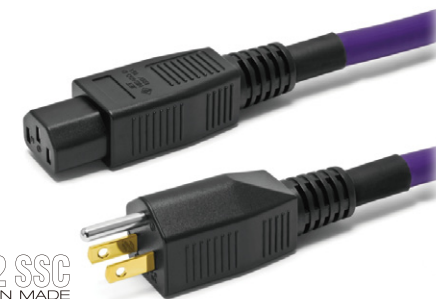

102 SSC  
JAPAN MADE

- Conductor "102 SSC" Special stranded wire 2.5sq (13AWG) #3conductor
- Insulation PO / Amorphous + tungsten mixed PO
- Shield Copper Foil Tape
- Jacket Halogen-free (Purple)
- Connector 24K Gold Plating Copper alloy + phosphor bronze Contacts Plugs

Power Cable

**L/i 50 G5**

Modified for Instruments and Recording

Lineup

**L/i 50 G5**

Type : Typ B Plug (NEMA5-15)  
- IEC320 C15

Length : 1.8m



- Conductor OFC (Annealed) 2.0sq (14AWG) #4conductor Tinned OFC 0.75sq (18AWG) #1conductor
- Insulation Silicone Rubber / PET Sleeveing
- Shield Not shielded
- Jacket Cotton Braid + PET Sleeveing (Blue on Silver)
- Connector Unplated Pure Brass Contacts Plug 24K Gold Plating Pure Brass Contacts IEC Plug

## Microphone Cable

# INNOVATOR series

Hi-Functionary for Professionals

### Lineup

#### INNOVATOR TRS

Type : 1/4"TRS - 1/4"TRS  
Length : 1.0m / 2.0m / 3.0m / 5.0m / 8.0m



#### INNOVATOR XFT

Type : XLR (F) - 1/4"TRS  
Length : 1.0m / 2.0m / 3.0m / 5.0m / 8.0m



#### INNOVATOR TXM

Type : 1/4"TRS - XLR (M)  
Length : 1.0m / 2.0m / 3.0m / 5.0m / 8.0m



#### INNOVATOR XLR

Type : XLR (F) - XLR (M)  
Length : 1.0m / 2.0m / 3.0m / 5.0m / 8.0m



#### INNOVATOR TS

Type : 1/4"TS - 1/4"TS  
Length : 1.0m / 2.0m / 3.0m / 5.0m / 8.0m



Collaborated with **aet**  
Innovative Design

- Conductor OFC 0.6sq (19AWG) #2conductors
- Insulation "NI"
- Shield Aluminium Foil Tape
- Jacket Pb-free (Charcoal gray)
- Connector 1/4" TS Phone Plug (NEUTRIX NP2X-BAG)  
1/4" TRS Phone Plug (NEUTRIX NP3X-BAG)  
3pin XLR Plug (NEUTRIK NC3\*XX-B)
- Solder SS-47 (Cu1.7Ag4.7Sn93.6)

## Microphone Cable

# PA-02 V2 series

Low Capacitance signal Transmission

### Lineup

#### PA-02 TRS V2

Type : 1/4"TRS - 1/4"TRS  
Length : 1.0m / 2.0m / 3.0m / 5.0m



#### PA-02 XFT V2

Type : XLR (F) - 1/4"TRS  
Length : 1.0m / 2.0m / 3.0m / 5.0m



#### PA-02 TXM V2

Type : 1/4"TRS - XLR (M)  
Length : 1.0m / 2.0m / 3.0m / 5.0m



#### PA-02 XLR V2

Type : XLR (F) - XLR (M)  
Length : 1.0m / 2.0m / 3.0m / 5.0m



#### PA-02 TS V2

Type : 1/4"TS - 1/4"TS  
Length : 1.0m / 2.0m / 3.0m / 5.0m



102 SSC  
JAPAN MADE

- Conductor "102 SSC" 3E stranding  
0.75sq (18AWG) #2conductors
- Insulation EPP
- Shield "102 SSC" (Braid)
- Jacket Halogen-free (Purple)
- Connector 1/4" TS Phone Plug (P-285M)  
1/4" TRS Phone Plug (P-285T)  
3pin XLR Plug (Switchcraft AAA)
- Solder SS-47 (Cu1.7Ag4.7Sn93.6)

## Microphone Cable

# QAC-222 series

Natural and Powerful sounds

### Lineup

#### QAC-222 TRS

Type : 1/4"TRS - 1/4"TRS  
Length : 1.0m / 2.0m / 3.0m / 5.0m / 7.0m



#### QAC-222 XFT

Type : XLR (F) - 1/4"TRS  
Length : 1.0m / 2.0m / 3.0m / 5.0m / 7.0m



#### QAC-222 TXM

Type : 1/4"TRS - XLR (M)  
Length : 1.0m / 2.0m / 3.0m / 5.0m / 7.0m



#### QAC-222 XLR

Type : XLR (F) - XLR (M)  
Length : 1.0m / 2.0m / 3.0m / 5.0m / 7.0m



#### QAC-222 TS

Type : 1/4"TS - 1/4"TS  
Length : 1.0m / 2.0m / 3.0m / 5.0m / 7.0m



#### QAC-222 RCA (Pair)

Type : RCA - RCA  
Length : 1.0m / 2.0m / 3.0m / 5.0m



#### QAC-222 RTS (Pair)

Type : RCA - 1/4"TS  
Length : 1.0m / 2.0m / 3.0m / 5.0m



#### QAC-222 35-35 TRS

Type : 3.5mmTRS - 3.5mmTRS  
Length : 1.0m / 2.0m / 3.0m



#### QAC-222 35-63 TS

Type : 3.5mmTS - 1/4"TS  
Length : 1.0m / 2.0m / 3.0m



- Conductor HC-OFC 0.4sq (21AWG) #2conductors
- Insulation PE / LDPE
- Shield HC-OFC (Braid)
- Jacket Pb free PVC (Green)
- Connector 24K Gold Plating RCA Plug (Dedicated QAC-222)  
1/4" TS Phone Plug (P-275M)  
1/4" TRS Phone Plug (P-275T)  
Nickel Plating 3.5mm TS Phone Plug (Dedicated QAC-222)  
Nickel Plating 3.5mm TRS Phone Plug (Dedicated QAC-222)  
3pin XLR Plug (Switchcraft AAA)
- Solder SS-47 (Cu1.7Ag4.7Sn93.6)

## Microphone Cable

# AR-910M

Premium and Supreme Quality

### Lineup

#### AR-910M

Type : XLR (F) - XLR (M)  
Length : 3.0m / 5.0m



- Conductor 5N Purity Silver 1.05mm (18AWG) #2conductors
- Insulation PFA / EPE / PE Tape
- Shield Conductive PVC / Copper Foil Tape / Silver Plating Copper (Braid)
- Jacket UV protection PU (Clear)
- Connector Silver and Rhodium plating 3pin XLR Plug ("OYAIDE FOCUS 1" for AR-910M)
- Solder SS-47 (Cu1.7Ag4.7Sn93.6)

75ohm Digital Cable

# AS-808 V2 series

for S/PDIF and Word Clock

## Lineup

### AS-808 R V2

Type : RCA-RCA  
Length : 0.6m / 1.0m / 2.0m / 3.0m



### AS-808 B V2

Type : BNC-BNC  
Length : 0.6m / 1.0m / 2.0m / 3.0m



102 SSC  
JAPAN MADE

- Conductor "102 SSC" 1.0mm (18AWG) #Coax
- Insulation PE tube + PE string
- Shield Copper Foil Tape / "102 SSC" (Braid)
- Jacket PVC (See Thru Blue-gray)
- Connector 24K Gold Plating RCA Plug (Dedicated AS-808 V2)  
Nickel Plating BNC Plug (Dedicated AS-808 V2)
- Solder SS-47 (Cu1.7Ag4.7Sn93.6)



110ohm 8ch Snake Cable

# PA-08 V2 series

for AES/EBU Digital and Analog

## Lineup

### PA-08 DD V2

Type : D-sub25 - D-sub25  
Length : 1.5m / 3.0



### PA-08 DT V2

Type : D-sub25 - 1/4"TRS  
Length : 1.5m / 3.0



### PA-08 DXF V2

Type : D-sub25 - XLR (F)  
Length : 1.5m / 3.0




### PA-08 DXM V2

Type : D-sub25 - XLR (M)  
Length : 1.5m / 3.0



### PA-08 XLR V2

Type : XLR (F) - XLR (M)  
Length : 1.5m / 3.0




### PA-08 TRS V2

Type : 1/4"TRS - 1/4"TRS  
Length : 1.5m / 3.0




### PA-08 DXFM V2

Type : D-sub25 - XLR (F) / XLR (M)  
Length : 1.5m / 3.0



102 SSC  
JAPAN MADE

- Conductor "102 SSC" 0.18sq (25AWG) #16conductors #8pairs
- Insulation EPE
- Shield Aluminium Foil Tape
- Jacket PO w/Anti-vibration material (Black)
- Connector D-sub 25 (JAE Aluminium Die-cast housing) (Dedicated PA-08 V2)  
3pin XLR Plug (Switchcraft AAA)
- Solder SS-47 (Cu1.7Ag4.7Sn93.6)

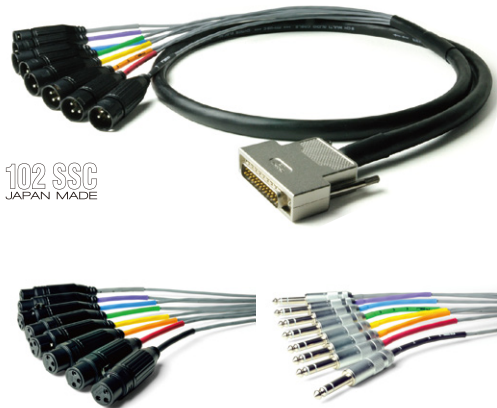

**NEO**  
Created by OYAIDE Elec.

cables for

electric GUITAR / BASS  
AMPLIFIERS  
EFFECT PEDALS



## Instrument Cable

# Ecstasy

CABLE

You will feel oneness with sound

### Lineup

#### Ecstasy Cable SS

Type : 1/4"TS - 1/4"TS  
Length : 1.8m / 3.0m  
/ 5.0m / 7.0m



#### Ecstasy Cable LS

Type : 1/4"TS - 1/4"TS  
Length : 1.8m / 3.0m  
/ 5.0m / 7.0m



#### Ecstasy Cable SS (PATCH)

Type : 1/4"TS - 1/4"TS  
Length : 0.3m / 0.6m



#### Ecstasy Cable LS (PATCH)

Type : 1/4"TS - 1/4"TS  
Length : 0.3m / 0.6m



#### Ecstasy Cable LL (PATCH)

Type : 1/4"TS - 1/4"TS  
Length : 0.15m / 0.3m / 0.6m



- Conductor Silver Plating Copper + Aramid Fiber 0.75sq (18AWG) #Coax
- Insulation PE
- Shield Conductive PVC / Tinned Copper (Braid)
- Jacket Pb free PVC (Silver gray)
- Connector Special Copper Plated 1/4" TS Phone Plug (Dedicated Ecstasy Cable)
- Solder KojimaSolder HMX-Pb113 (SnPb+*t.e.*)

## Instrument Cable



### Lineup

#### GSP-5 SS

Type : 1/4"TS - 1/4"TS  
Length : 3.0m / 5.0m / 7.0m



#### GSP-5 LS

Type : 1/4"TS - 1/4"TS  
Length : 3.0m / 5.0m / 7.0m



#### GSP-5 LS (PATCH)

Type : 1/4"TS - 1/4"TS  
Length : 0.3m



#### GSP-5 LL (PATCH)

Type : 1/4"TS - 1/4"TS  
Length : 0.15m / 0.3m



#### GSP-5 CLL (PATCH)

Type : 1/4"TS - 1/4"TS  
Length : 0.15m / 0.3m



- Conductor TPC + Aramid Fiber 0.5sq (20AWG) #Coax
- Insulation PO
- Shield Conductive PVC / TPC (Spiral)
- Jacket PVC (Purple)
- Connector Nickel Plated 1/4" TS Phone Plug (Dedicated GSP-5)
- Solder Kester 44 (Sn40Pb60)

## Instrument Cable

# QAC-222G

HC-OFC CONDUCTOR CABLE

High Purity Cable for Guitar, Bass and Instruments

### Lineup

#### QAC-222G SS

Type : 1/4"TS - 1/4"TS  
Length : 3.0m / 5.0m / 7.0m



#### QAC-222G LS

Type : 1/4"TS - 1/4"TS  
Length : 3.0m / 5.0m / 7.0m



#### QAC-222G SS (PATCH)

Type : 1/4"TS - 1/4"TS  
Length : 0.3m / 0.6m



#### QAC-222G LS (PATCH)

Type : 1/4"TS - 1/4"TS  
Length : 0.3m / 0.6m



#### QAC-222G LL (PATCH)

Type : 1/4"TS - 1/4"TS  
Length : 0.15m / 0.3m / 0.6m



#### for AXE-FX series


#### QAC-222G Humbuster SS

Type : 1/4"TRS - 1/4"TS  
Length : 0.7m



#### QAC-222G Humbuster SL

Type : 1/4"TRS - 1/4"TS  
Length : 0.7m



- Conductor HC-OFC (Annealed) 0.4sq (21AWG) #2conductors
- Insulation PE / LDPE
- Shield HC-OFC (Braid)
- Jacket Pb free PVC (Red)
- Connector Nickel Plated 1/4" TS Phone Plug (Dedicated QAC-222G)
- Solder SS-47 (Cu1.7Ag4.7Sn93.6)

## Instrument Cable

# WL-606 II series

for Wireless Systems

### Lineup

#### for LINE6 G30 etc..

#### WL-606 II SS

Type : 1/4"TS - 1/4"TS  
Length : 0.6m



#### WL-606 II LS

Type : 1/4"TS - 1/4"TS  
Length : 0.6m



#### for LINE6 G50/G90 etc..

#### WL-606 II SX

Type : 1/4"TS - 4pinXLR (F)  
Length : 0.6m



#### WL-606 II LX

Type : 1/4"TS - 4pinXLR (F)  
Length : 0.6m



#### for SHURE GLXD16

#### WL-606 II SXS

Type : 1/4"TS - 4pinXLR (F)  
Length : 0.6m



#### WL-606 II LXS

Type : 1/4"TS - 4pinXLR (F)  
Length : 0.6m



102 SSC  
JAPAN MADE



- Conductor "102 SSC" 0.75sq (18AWG) #Coax
- Insulation XLPE
- Shield "102 SSC" (Braid)
- Jacket Elastomer + Nylon Sleaving (Black)
- Connector 1/4" TS Phone Plug (P-275M / P-275L)
- Solder 4pin Mini XLR (F) w/Threaded-collar locking Kester 44 (Sn40Pb60)

# Instrument Cable

## Solderless series

for Patch and more...



102 SSC  
JAPAN MADE

### Lineup

#### SLP-240S

Nickel Plating Straight 1/4" TS Phone Plug

#### SLP-240L

Nickel Plating Right Angled 1/4" TS Phone Plug

#### SLR-240 pair

Nickel Plating RCA Plug (1set of 2)

- Material Brass (RoHS compliant)
- Method "Dual Clawed Locking System" (Patented)
- Hole Size 4.2mm

#### SLD-ZERO

- Conductor "102 SSC" 0.56sq (20AWG) #Coax
- Insulation SH-PVC
- Shield "102 SSC" (Braid)
- Jacket Carbon Soft PVC (Black)

#### RS-10 (Dedicated tool set)

Contents :  
SP-10 (10mm HEX Spanner) x 2pc  
Recycle Stick (Tool for SLP-240 and SLR-240) x 1pc



#### STARTING KIT!

##### L6+

Contents :  
SLP-240L x 6pc  
SLD-ZERO x 1.5m  
RS-10 x 1set

##### L6S6+

Contents :  
SLP-240L x 6pc  
SLP-240S x 6pc  
SLD-ZERO x 3.0m  
RS-10 x 1set

##### L12+

Contents :  
SLP-240L x 12pc  
SLD-ZERO x 3.0m  
RS-10 x 1set



##### R4+

Contents :  
SLR-240 pair x 2set  
SLD-ZERO x 1.5m  
RS-10 x 1set

##### R8+

Contents :  
SLR-240 pair x 4set  
SLD-ZERO x 3.0m  
RS-10 x 1set


## Dual Claw Locking System

**POINT 1**  
The most robust ever

Carved internal threading to hold the cable securely

The two claws bite into each other, allowing the shield to conduct

**POINT 2**  
Easy and quick assembly

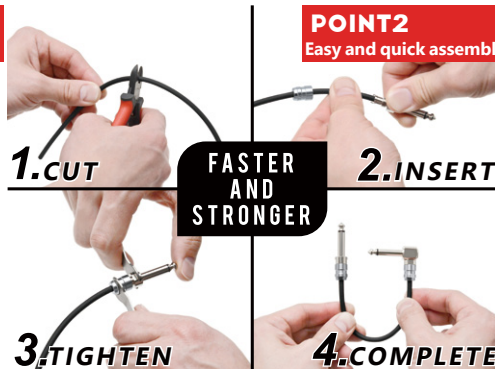

FASTER AND STRONGER

# Speaker Cable

## SP-3398 series

for Guitar/Bass Amp

### Lineup

#### SP-3398 SS

Type : 1/4" TS - 1/4" TS  
Length : 0.6m / 1.0m / 1.5m / 5.0m / 7.0m



#### SP-3398 LS

Type : 1/4" TS - 1/4" TS  
Length : 0.6m / 1.0m / 1.5m / 5.0m / 7.0m



#### SP-3398 SPS

Type : SpeakON - 1/4" TS  
Length : 0.6m / 1.0m / 1.5m / 5.0m / 7.0m



#### SP-3398 SPSP

Type : SpeakON - SpeakON  
Length : 0.6m / 1.0m / 1.5m / 5.0m / 7.0m



102 SSC  
JAPAN MADE

- Conductor "102 SSC" 1.25sq (16AWG) #4conductors
- Insulation XLPE
- Standard UL AWM Style 3398
- Rating VW-1 / 150 deg C 300V (600V at Peak)
- Connector 1/4" TS Phone Plug (P-275M / P-275L) SpeakON (NEUTRIK NL4FX)

# DC Power Cable

## DC-3398 LL

for Effect Pedals

### Lineup

#### DC-3398 LL

Type : DC2.1mm - DC2.1mm  
Length : 0.1m / 0.2m / 0.3m / 0.5m / 0.9m



102 SSC  
JAPAN MADE

- Conductor "102 SSC" 0.75sq (18AWG) #2conductors
- Insulation XLPE
- Standard UL AWM Style 3398
- Rating VW-1 / 150 deg C 300V (600V at Peak)
- Connector 5.5mm OD • 2.1mm ID Gold Plated DC Plug
- Accessory Identification Stickers (3colors x 2pcs)

# Original 1/4" Phone Plugs

series

### Lineup

#### P-275M / P-285M

Nickel Plating Straight 1/4" TS Phone Plug

#### P-275L / P-285L

Nickel Plating Right Angled 1/4" TS Phone Plug

#### P-275T / P-285T

Nickel Plating Straight 1/4" TRS Phone Plug



- Material Brass (RoHS compliant)
- Method Soldering
- Hole Size 7.5mm / 8.5mm

P-275  
~7.5mm

P-285  
~8.5mm



## **Oyaide Elec., Co. Ltd.**

1-9-6 Yushima Bukyo-ku Tokyo 1130034 Japan

TEL : +81-3-5684-2151 FAX : +81-3-5684-2150

<https://www.neo-w.com/english/>

DATA : May 2022

Product specifications and appearance are subject to change without notice for improvement.

Copyright © OYAIDE ELEC. CO., LTD. All Rights Reserved.