

kanto 
ORA

Everything a desktop speaker should be.

Creator. Gamer. Musician. No matter how you define yourself, you deserve defined sound. ORA bridges the gap between computer speakers and studio monitors giving you studio-grade, audiophile-approved sound without dominating your space. ORA has modern inputs like USB-C to get the best sound from your PC or Mac, Bluetooth® 5.0 to pair with your phone or smart home device, and RCA for your analog gear. Sporting a crossover that automatically sends bass to a connected subwoofer, you get flawless low-end integration freeing up the 3" woofers and 3/4" silk dome tweeters to focus on what they do best. ORA is the perfect blend of reference-quality sound and modern features at a compact size to fit on your desktop.



FEATURES & SPECIFICATIONS

Tweeters	3/4" silk dome	Dimensions (each speaker)	3.9" W x 5.6" D x 6.9" H (10 x 14.1 x 17.5 cm)
Woofers	3" paper cone (magnetically shielded)	Net Weight (active)	2.2 lb (1 kg)
Amplifier Type	Class D bi-amplified	Net Weight (passive)	2.2 lb (1 kg)
Power Output	100 W peak power (50 W total RMS)	Gross Weight (boxed pair)	8.2 lb (3.7 kg)
Power Output (Per Tweeter)	9 W RMS	Shipping Box Dimensions	8.9" W x 15.1" D x 10" H (22.7 x 38.3 x 25.4 cm)
Power Output (Per Woofer)	16 W RMS	UPC:	800152721309
Frequency Response	70 Hz - 22 kHz		
High/Low-Pass Filter	100 Hz (automatic)		
Inputs	1 x RCA line-level 1 x USB-C (16 bit/48 kHz) 1 x Bluetooth® 5.0		
Outputs	1 x sub-out		
Speaker Terminals	4-pin connector		
Rear Mounting Hole	1/4"-20		
Input Voltage / Frequency	AC 100 V - 240 V 50/60 Hz		
Standby Power Consumption	< 0.5 W		



REFERENCE QUALITY

100W of DSP-tuned, bi-amplified Class-D power for near studio-grade sound with shockingly deep bass from its 3" woofers. Linear enough to pull double duty as a studio monitor and a multimedia speaker.



PLUG 'N PLAY

ORA desktop speakers feature three inputs cover your digital and analog needs. USB-C to get the best sound from your PC or Mac, Bluetooth 5.0 pairs seamlessly with your phone or smart home device, and RCA for your analog gear.



SEAMLESS SUB INTEGRATION

A crossover network kicks in automatically when a sub is connected letting ORA focus on vocals and high frequencies. By relieving ORA of sub-bass duties, you can play louder with less distortion.



COMPACT SIZE

Coming in at a fraction of the size of full-size bookshelf speakers, ORA is small enough to place sideways under a monitor or toss into a backpack for an impromptu recording session.



RETRO FRIENDLY


With magnetically shielded drivers, there's no fear of placing ORA directly beside your CRT or high-end PVM. Hear every square wave and sawtooth in stunning detail from the analog RCA input.



REAR MOUNTABLE

A 1/4"-20 threaded insert located at the rear of each speaker let's you wall, or ceiling mount ORA with any compatible speaker mounting bracket.

TECHNICAL ILLUSTRATIONS

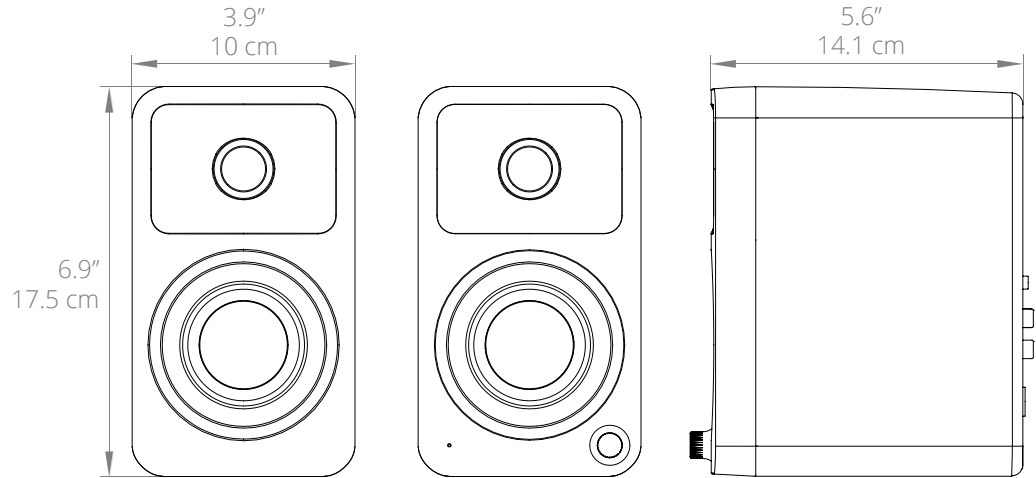

WHAT'S IN THE BOX?



USER MANUALS



8 SELF-ADHESIVE RUBBER FEET



AC/DC POWER SUPPLY



4-PIN SPEAKER CABLE